





DC Wall Controller Companion Handset

- 0** Turns the fan off.
- 1-5** Turns the fan on & selects the speed (1:Low to 5:High).
-  Forward/Reverse button (Summer/Winter toggle).
-  Natural Wind Mode - gentle sea-breeze effect.
-  Long-press (press & hold) to decrease the brightness of the downlight. Short-press (press & release) to turn the downlight on/off.
-  Long-press (press & hold) to increase the brightness of the downlight. Short-press (press & release) to turn the downlight on/off.
- 1H/3H** Fan and light (if installed) will switch off after 1/3/6/8 hours.
- 6H/8H**

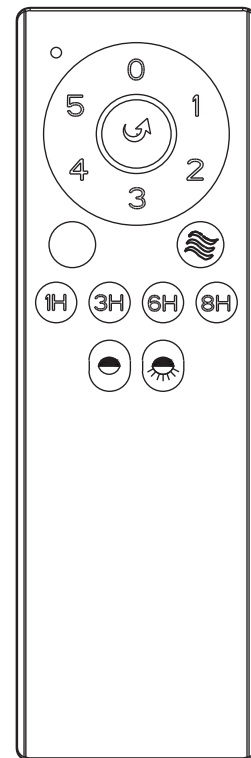


Fig 1



IMPORTANT – Choose the correct operating mode for the handset by setting the dip switch in the back of the handset, depending on your preference (see Fig 2).

COMMON mode (Upper): Handset will operate ALL fans in range using the same style of receiver.

LEARN mode (Lower): Handset can be paired with specific fans using the learning setup process below.




Fig 2

Learning Mode: Complete the Pairing Process

The handset must have the dipswitch toggled down to be in the LEARN position for the Pairing Process to work. Ensure the back of the handset is open and you have a ballpoint pen or small object to be able to press the LEARN BUTTON when needed.

Step 1: Isolate power to the fan using the isolation switch on the wall and wait 60 seconds.

Step 2: Restore power to the fan and within 30 seconds, press and hold the LEARN BUTTON (Fig. 4) for 3-5 seconds.

Step 3: The fan should turn on. Test the handset to confirm it is correctly paired to the receiver.




Fig 4

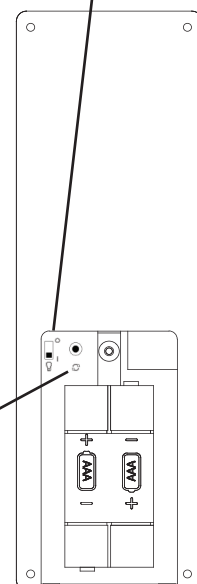


Fig 3